

(Repared from
Form PTC-1380)Transmitted to the United States
Designated/Elected Office (DO/EO/US)

09/719136

Page 1

Customer No.	026418	
Attorney's Docket No.:	COLLI P-30 / 500556.20006	
U.S. Application No.:		
International Application No.:	PCT/AU99/00448	
International Filing Date:	JUNE 09, 1999	09 JUNE 1999
Priority Date Claimed:	JUNE 11, 1998	11 JUNE 1998
Title of Invention:	TEMPERATURE CONTROL METHOD AND APPARATUS	
Applicant(s) for (DO/EO/US):	Malcolm Barry JAMES	

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

- [X] 1. This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
- [] 2. This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
- [] 3. This express request to begin national examination procedures [35 U.S.C. 371 (f)] at any time rather than delay examination until the expiration of the applicable time limit set forth in 35 U.S.C. 371(b) and PCT Articles 22 and
- [] 4. A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
- [] 5. A copy of the International Application as filed [35 U.S.C. 371(c)(2)]
- a) ☐ is transmitted herewith (required only if not transmitted by the International Bureau)
- b) ☐ has been transmitted by the International Bureau
- c) ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
- [] 6. A translation of the International Application into English [35 U.S.C. 371(c)(2)]
- [] 7. Amendments to the claims of the International Application under PCT Article 19 [35 U.S.C. 371(c)(3)]
- a) ☐ are transmitted herewith (required only if not transmitted by the International Bureau)
- b) ☐ have been transmitted by the International Bureau
- c) ☐ have not been made; however, the time limit for making such amendments has **NOT** expired.
- d) ☐ have not been made and will not be made
- [] 8. A translation of the amendments to the claims under PCT Article 19 [35 U.S.C. 371(c)(3)]
- [] 9. An **UNSIGNED** oath or declaration of the inventor(s) [35 U.S.C. 371(c)(4)] **Executed Decl/POA - TO FOLLOW**
- [] 10. A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 [35 U.S.C. 371(c)(5)]

Items 11. to 16. below concern other document(s) or information included:

- [X] 11. An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98
- [] 12. An Assignment document for recording. A separate cover sheet (PTO-1595) in compliance with 37 CFR 3.28 and 3.31 is included.
- [] 13. ☐ A **FIRST** preliminary amendment
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment
- [] 14. A substitute specification
- [] 15. A change of power of attorney and/or address letter
- [X] 16. (other items or information) **Publication No. WO 99/64218 16DEC99, PCT/IPEA/409 20JUL00 with Amended Claims and PCT/IPEA/416 25JUL00; Information Disclosure Statement, Search Report PCT/ISA/210 8JUL99 and 6 cited references.**

EXPRESS MAIL No.: EL 758 809 612 US

Deposited: December 7, 2000

I hereby certify that this correspondence is being deposited with the United States Postal Service Express mail under 37 CFR 1.10 on the date indicated above and is addressed to: BOX PCT, Assistant Commissioner for Patents, Washington, DC 20231.

/Ruth Montalvo Date: December 7, 2000

533 Rec'd PCT/PTO 07 DEC 2000

CALCULATIONS PTO USE ONLY

- ☒ 17. The following fees are submitted: **BASIC NATIONAL FEE [37 CFR 1.492(a)(1)-(5)]**
- ☐ Search Report has been prepared by the EPO or JPO..... \$ 860.00
- ☐ International preliminary examination fee paid to USPTO [37 CFR 1.482]..... \$ 690.00
- ☐ No International preliminary examination fee paid to USPTO [37 CFR 1.482] but International search fee paid to USPTO [37 CFR 1.445(a)(2)]..... \$ 710.00
- ☒ Neither International preliminary examination fee [37 CFR 1.482] nor International search fee [37 CFR 1.445(a)(2)] paid to USPTO..... \$ 1,000.00
- ☐ International preliminary examination fee paid to USPTO [37 CFR 1.482] and all claims satisfied provisions of PCT Article 33(1)-(4)..... \$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT:**\$1,000.00**

Claims	Number Filed	Number Extra	Rate	
Total Claims (Amended sheets)	22(17)	2	x \$ 18. =	\$ 36.00
Indep. Claims	6	-03	x \$ 80. =	\$ 240.00
<input checked="" type="checkbox"/> Multiple Dependent Claim(s) (if applicable)				+ \$ 270. =
				\$ 270.00

TOTAL OF ABOVE CALCULATIONS:**\$1,546.00**

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date [37 CFR 1.492(e)]

TO FOLLOW**TOTAL OF ABOVE CALCULATIONS:****\$1,546.00**

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must be filed. [Note 37 CFR 1.9, 1.27, 1.28]

\$**SUBTOTAL:****\$1,546.00**

Processing fee of \$130.00 for furnishing the English Translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date [37 CFR 1.492(f)]

\$**TOTAL NATIONAL FEE:****\$1,546.00**

Fee for recording the enclosed assignment [37 CFR 1.21(h)]. The assignment must be accompanied by an appropriate cover sheet (PTO-1595) [37 CFR 3.28, 3.31]. \$ 40.00 per property +

\$**TOTAL FEE(S):****\$1,546.00**

AMOUNTS TO BE
REFUNDED OR CHARGED

REFUNDED \$
CHARGE \$

(Please note the filing fee is based on the claims in the Amended sheets (PCT/IPES/416))

- ☐ Check in the amount of \$ **0.00** to cover the above fees is enclosed.
- ☒ The Commissioner is hereby authorized to charge the fee of \$ 1,546.00 to Deposit Account No. 50-1529, and any additional fees required with this submission or to credit any overpayment to Deposit Account No. 50-1529.)

NOTE: Where an appropriate time limit under 36 CFR 1.494 or 1.495 has not been met, a petition to revive [37 CFR 1.137(a) or (b)] must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

J. Harold Nissen, Esq. (Customer No. 026418)

Reed Smith LLP
375 Park Avenue
New York, NY 10152

J. Harold Nissen

Name (Tel. (212) 986-4096)

Signature

17,283

Reg. No.

December 7, 2000

Date

09/719136

1

TEMPERATURE CONTROL METHOD AND APPARATUS

5 This invention relates to a temperature control method and apparatus applicable to machines and has particular application to dies and to moulding of articles using dies in processes such as injection moulding, thermoforming, vacuum forming metal die casting and the like.

10 The invention will be described with respect to an application but it is not intended that the concept should be constrained simply to that application.

15 It is well known that a die can be kept within an acceptable temperature range by use of water passing through passages in the die to a separate heat exchange station.

20 One of the challenges in the design of dies is to ensure that the working parts of the die have sufficient access to cooling water. This can at times be very difficult indeed if, for instance, there is very little room for appropriate passages for water to be transported to and from a location in sufficient volume.

25 Such a challenge of keeping the working parts of a die within an acceptable range of temperatures is no small matter and can involve considerable costs in the manufacturing and commissioning of a die. One of the problems experienced is that unless the water is demineralised which is generally uneconomic because of the volume of replacement water needed, then scale build up will occur which again can be costly to treat and can lead to reduced efficiency in cooling over time.

30 A further problem is the corrosion in the cooling passages caused by their exposure to aerated cooling water.

35 Further the efficiency of cooling can be a very significant factor in the repetition rate of use of a die. If there were a more efficient way of cooling the die may be able to be used at greater repetition rates which is significant as far as costs of production using the die are concerned.

Further uneven cooling rates between different portions of a moulding die can cause distortion of the moulded parts for which rectification or compensation can be costly.

It is an object of this invention to propose an alternative way to effect temperature control of a machine which at least reduces some of the above difficulties.

- 5 In one form of this invention this can be said to reside in a mould of a type requiring heat to be taken from the mould from time to time, characterised in that the mould includes at least one closed chamber having liquid therein which extends to cover at least one of the areas from which heat is to be taken, and a space above the liquid and within the closed chamber, wherein pressure is set at a level which will enable
10 the liquid to boil at a selected temperature and condensing means to effect, by cooling, condensation of vapour of the liquid in the space.

- In preference there are more than one chamber and each chamber is shaped and positioned together with the level of liquid therein so that the liquid will access during
15 washing conditions areas in the machine from which heat is to be taken.

In preference the liquid is water.

- In preference the mould is a machine for moulding of plastics materials.
20

In preference the mould is a mould for injection moulding of plastics materials.

- In preference the mould is a mould for moulding by thermoforming of plastics materials.
25

In preference the mould is a mould for the die casting of metals.

- In a further preferred form of this invention this can be said to reside in a mould having an internal cooling arrangement which includes a closed chamber having
30 therein a liquid with a volume such that it has an upper level above one of the areas of the mould to be cooled and substantially only the vapour of the liquid within the chamber above the upper level of the liquid.

- In a further preferred form of this invention this can be said to reside in a mould for
35 injection moulding of plastics materials having an internal cooling arrangement which is a closed chamber partially filled with a liquid with an upper level sufficient that areas of the die within the chamber adjacent to parts of the die to be cooled will be

accessed by the liquid and, in the space in the chamber above the liquid, substantially only the vapour of the liquid.

- 5 In a further preferred form of this invention this can be said to reside in a mould for injection moulding of plastics materials having an internal cooling arrangement which is a closed chamber partially filled with a liquid with an upper level of sufficient height so that one of the areas of the mould within the chamber adjacent to parts of the mould to be cooled is covered by the liquid and, in the space in the chamber above the liquid, substantially only the vapour of the liquid, and an arrangement to
10 provide cooling of any vapour within the space in the chamber above the liquid level to effect at least some condensation of the vapour thereby.

- 15 In preference there is at least in addition, a heating means located within the chamber within the liquid such that during a standby time, the temperature of the mould can be kept within a selected range of temperatures.

In preference the cooling means include a tube, a core in the tube and means to direct cooling water through the tube.

- 20 In a further preferred form of this invention this can be said to reside in a method of cooling of parts of a mould where the mould has at least one closed chamber having liquid therein which extends to cover at least one of the areas from which heat is to be taken, and a space above the liquid and within the closed chamber in which the pressure is caused to be at a level at which the temperature of the boiling
25 point of the liquid will be to at least a selected extent below the temperature of the area from which heat is to be taken and there are condensing means to effect, by cooling, condensation of vapour of the liquid in the space.

- 30 In a further preferred form of this invention this can be said to reside in a method of cooling of parts of a mould where the mould has at least one closed chamber having liquid therein which extends to cover at least one of the areas from which heat is to be taken, and a space above the liquid and within the closed chamber in which the pressure is caused to be at a level at which the temperature of the boiling point of the liquid will be at least a selected extent below the temperature of the
35 area from which heat is to be taken this being by reason of, as a first step, filling of the closed chamber with the liquid and then extracting a sufficient proportion of the liquid without allowing air to replace the extracted liquid, and passing at a selected

cooling temperature, liquid through condensing means to effect, by such cooling, condensation of vapour of the liquid in the space.

- 5 In use then condensation of the vapour may be effected by providing a heat exchange either by an independent member within the space above the liquid level or by having a portion or all of the wall defining the chamber in an area above the liquid surface which is at a lesser temperature but in any event, so that there will be a reasonably effective exchange of heat from the vapour of the liquid so that this then condenses back into liquid and will flow back into the body of the liquid within the closed chamber.

- 10 The portion of the chamber to receive heat will, by reason of a raised temperature of the immediately adjacent liquid to a level of that of liquid in adjacent areas, effect an exchange of state of the liquid in this area to vapour which by reason of the latent heat capacity of the vapour will be a very substantial carrier of heat. By reason of relative densities then, the vapour thus formed will rise to the surface of the liquid, continuing to fill the space above the liquid where continuing condensation is being effected by a reverse exchange of heat.
- 15 The boiling of the liquid occurs in a very vigorous manner because at very low pressures the volume of vapour produced is very high compared with the volume of liquid being vapourised. This raises the effective level of the liquid relative to a rest state, enabling it to affect areas of the mould that are above its rest level.
- 20 What we have then is a closed chamber with its selected liquid operating so that it is at a temperature and pressure governed by its own vapour pressure and by external inputs of heat.

A number of variations can be incorporated within the general concept.

- 30 In a first method, the internal chamber is filled entirely with the liquid to be used. In preference, such liquid is previously treated so as to remove dissolved gases and other impurities so that in preference, the liquid is a liquid without impurities which may otherwise interfere with the process or the efficiency in general of the process.

- 35 Once full and sealed, the chamber is then accessed through a gate valve so that some of the liquid is then extracted with a pump to a level that is chosen such that the level will be below a condensation member or means within the upper part of

the chamber, and that there will be liquid in contact with a heat source which is to provide the heat to be dissipated.

- 5 In a further preferred method the chamber can be partially filled to a required level and the residual air can be removed to a sufficient extent by a conventional vacuum pump capable of achieving residual pressures of less than 13 millibars.

- 10 Following these steps, the mould is then ready to be used where there is a heat exchanger in an upper part of the internal chamber to provide heat exchange where a further liquid is pumped through the heat exchanger at a preferred mould operating temperature but in preference not a low enough temperature to cause freezing of the liquid.

- 15 It is expected at this stage that the liquid would normally be water but it is understood that there are many liquids other than water that would provide a good effect.

- 20 For each individual circumstance, the degree of heat to be shifted, the extent of the hot surfaces to be cooled, and the general temperature that has to be worked on, need to be considered to take into account the overall shape and dimensions of the chamber, the fluid to be used, the degree of vapour space above the liquid level, and the condensing means within the vapour space.

- 25 In experiments so far conducted, such an arrangement provides very effective and relatively uniform heat transfer. While reference has been made to a chamber, this does not of itself exclude the case where there can be separate chambers connected by sealed conduits.

- 30 A chamber then is to be considered as a concept broad enough to encompass any closed environment.

For a further explanation of the invention this will be described with reference to a further embodiment which shall be described with reference to an accompanying drawing wherein:

- 35 FIG. 1 is a schematic cross sectional view of a thermoforming apparatus in accordance with a first embodiment;

FIG. 2 is a cross sectional view of the male side of a plastic injection die;

FIG. 3 is a cross sectional view along the lines 3-3 in FIG. 2 of the second

embodiment;

FIG. 4 is an exploded perspective view of the plastic injection die, the male side of which is shown in FIGS. 2 and 3;

FIG. 5 is an exploded perspective view of the parts forming the portion of
5 the second embodiment as shown in FIGS. 2 and 3; and

FIG. 6 is a section along the lines 6-6 in FIG.3.

Referring in detail to Figure 1 there is shown a thermoforming apparatus 1 with a
10 plug 2 arranged to push plastic sheet into a shaping cavity 3. The sheet 4 is
subject to conventional treatment including having air at pressure drive the formed
sheet 4 into close conforming shape of the cavity 3.

The cavity 3 is surrounded by a hollow body 5 which defines a closed chamber
15 together with conduits 6 and 7 and condensing container 8. Within the condensing
container 8 is a heat exchange coil 9 which is supplied with appropriate cooling
refrigerant.

Conduit 7 passes beneath plastic sheet holding means 13 and therefore could
20 cause a liquid blockage to passage of vapour through to the condensing container
8.

This effect can be removed by introducing additional heat through heating coil 11
which will effect a vaporisation of the liquid at this location.

25 Initial startup of this apparatus is achieved by filling the chamber which includes the
hollow body 5, the conduits 6 and 7 and the container 8 with water. Through the
valve 12 water is then extracted until its level is lowered to a level as shown at 15.
This then leaves an upper evacuated space 16 which will then be filled implicitly by
substantially only the vapour of the liquid.

30 From here on the arrangement will remain as a closed system so that heat from the
wall of the cavity 3 will be converted into latent heat of vaporisation with the vapour
reaching the condensing chamber 8 to be returned to liquid. as it gives up the latent
heat of vaporisation to the heat exchange coil 9.

35 Now referring to FIGS. 2 through to 5, there is shown specifically in FIGS. 2, 3 and
5 the male side of an injection die and for ease of description, reference will be

made to these parts and then later to the female side of the die as more generally shown in FIG. 4.

Accordingly, the male form 17 is attached through appropriate bolts which are
5 located at position such as at 18 to a block 19 which together with a backplate 20 forms a closed chamber 21 of similar shape to form 17 which holds a selected quantity of water shown generally at 22. Male form 17 and block 18 may be formed as a single piece.

10 The water 22 does not totally fill the enclosed and closed space 21 thereby leaving a space 23 above an upper level of the water 24.

There is a heat exchanging cooling device at 25 which is arranged by reason of
tube 26 which has a plurality of fins 27 to effect a cooling of water vapour as it
15 exists within the space 23.

The temperature of the fins 27 is governed by arranging for flow of cooling water through an inlet 28 which then proceeds through the centre of a removable core 29 to an end 30 where the water then is caused to pass through a spirally shaped gap
20 31 so that it will pass fully the length of the hollow core 29 to then exit through passageway 32.

An advantage of this arrangement is that the hollow core 29 is held by plug 33 so that from time to time, the core can be easily removed without affecting the status of
25 the evacuated space 23 and any build up of deposits, debris or otherwise can be then effectively cleaned.

A gate valve 34 is adapted to effect a closure of aperture 35 and evacuation port
30 44 and there is a further closable plug at 36.

In order to charge the die, water is first vigorously boiled for at least one minute so as to reduce possible dissolved gas from the water.

The water is then poured into the chamber 21 through aperture 36 so that it will fully
35 fill the chamber. The gate valve 34 includes a pair of sealing members 45 thereon which act so that when open, water can be extracted from the chamber through evacuation port 44 while maintaining the closure of aperture 35 and when closed, to prevent air from flowing into the chamber through the evacuation port 44.

The amount of water removed is such as to provide a sufficient space above the selected water level to allow for the cooling device to operate within the environment generally only of the water vapour and not the liquid water.

5

With the then degassed water partially filling the closed chamber 21, it will be seen that the water then covers or can access during operation those parts of the die as shown, for instance, in FIG. 1 or FIG. 2 which are immediately adjacent those areas that will be in contact with heated plastics materials and from which heat is to be extracted.

10

By reducing the pressure within the closed chamber 21, the water adjacent to the hotter parts of the die will be caused to boil at temperatures somewhat lower than 100 degrees Centigrade (212 degrees Fahrenheit) and because of the high value of the latent heat of evaporation of water such effect results in very efficient extraction of heat from the hotter parts of the die.

15

By reason of the orientation of the die, and by reason of shaping of the internal parts of the die so that vapour when formed can rise into the uppermost space within the closed chamber 21, this then will further concentrate water vapour in the space which in turn will be cooled and therefore be condensed by heat exchange from the heat exchanger system.

20

While different methods of preparing the status of liquid within the closed chamber 21 can be used, and there has been described in a general way, such an arrangement, in a further method, there is firstly provided a funnel with a spout threaded to fit the inlet or filling port to a capacity greater than the volume of water to be removed from the filled enclosed chamber 21.

25

A reciprocating vacuum pump with a single stroke capacity equal to the volume of water to be removed is attached to an evacuation port.

30

Once the water has filled the chamber, the vacuum pump can be used so as to withdraw and then return a number of times so as to cause water within the system to surge back and forth so as to assist in removal of any significant air bubbles which may have been trapped while filling.

35

The chamber is then again topped up with water on the basis that some air has been dislodged and driven to the surface of the water and the inlet or filling port is then closed.

5 The vacuum pump can again be caused to withdraw and return a number of times so as to cause water in the system to surge back and forth. With each withdrawal, the pressure inside the chamber will be considerably reduced and any remaining trapped bubbles of gas will expand and most will rise to the surface of the water.

10 The vacuum pump stroke is then returned and the chamber is again topped up with water and the inlet port is closed.

With a full stroke of the vacuum pump the required amount of water will be extracted and the gate valve 34 is then screwed in to close the evacuation port 44.

15 In this process, it is provided that the gate valve 34 allows the water to gravitate easily into the pump. Since air is excluded substantially, gravity is needed to move the liquid into the vacuum pump.

20 This describes, as has been previously stated, one side of an injection die where the further portion of the injection die is shown in exploded detail in FIG. 4. In this case then, there is a closed chamber 37 which surrounds a female shape 38 into which the male part 17 is located to form there between a moulding space served by inlet port 39.

25 A back plate 40 has sealed engagement with the die 41 and there are shown heat exchange means at 42 with a hollow removable core 43.

30 The filling procedure of this side of the die is the same as with the first male portion of the die.

One of the advantages of the arrangement described is that the temperature of the die is automatically evened out because boiling will occur preferentially at the higher temperature locations thereby reducing its temperature to that of its surrounding areas.

35

Consequently, with this system, there is a preferential evening effect of the temperature which means that more sophisticated techniques for attempting to keep temperatures even are no longer necessary.

- 5 The mould temperature, for instance, can be controlled very evenly and effectively by controlling the flow of coolant such as water, through the heat exchanger. This leads to the further arrangement including the location of a thermostat so as to respond to the temperature of the liquid in the closed chamber.
- 10 Accordingly, this can be connected through a servo controller so as to interrupt flow of coolant liquid through the heat exchanger whenever the temperature falls below a selected value and can restore or increase the flow rate of cooling liquid whenever the temperature of the fluid in the enclosed chamber rises above another slightly higher selected level.

15

EXPERIMENTAL RESULTS

- A prototype unit has been made and tested. This unit was manufactured as the male portion of the injection die which is the arrangement as shown in FIGS. 2, 3 and 5 with a face area of 250 mm and of course the disclosed protruding core, 70 mm in diameter and 55 mm long. The enclosed chamber then had a wall thickness at the die portion of 12 mm.
- 20

- The described method of effecting a charging of water which had been degassed and then having a portion removed to leave only water vapour in a space was applied.
- 25

The effectiveness of the cooling action described was tested as follows:

- 30 1. Coolant water was supplied to the heat exchanger at a temperature of 27 degrees Centigrade which was the ambient temperature at the time of the test.
2. Two gas blow torches were directed at the surface of the core and kept continuously heating on the outer surface of the protruding die surface. The temperature of the coolant, of the core and of water in the enclosed chamber were monitored using digital pyrometers.
- 35 3. The flow rate of coolant through the heat exchanger was adjusted to achieve a flow rate of four litres per minute.

AMENDED SHEET
12/01/00

4. The output of the blow torches was adjusted until a temperature rise of 2.7 degrees Centigrade in the coolant was achieved. This corresponded to a heat extraction rate of 750 watts.
5. The temperature of the die was found under these conditions to reach and be sustained at 48 degrees Centigrade which is to say 21 degrees Centigrade above the coolant temperature.
6. The temperature of water in the enclosed chamber was stabilised and was 35 degrees Centigrade.
- 10 Direct calculation of an expected temperature of the core, based on its geometry and the test conditions, were also made. The calculated temperature differential through the walls of the core is 12 degrees Centigrade and this was found to correspond very well with the experimental result. The remainder of the temperature differential (8 degrees Centigrade) is a function of the efficiency of the heat exchanger.
- 15

- It is considered from the above experimental results that these illustrate a very outstanding effective result which will be of very significant value in many applications where moulds are to be cooled and where achieving a uniformity of the cooling effect is of value.
- 20

- Further, because the closed chamber keeps the same water through the full cooling process, it is not expected that there will be mineral deposit or any significant corrosion (as a result of the absence of air).
- 25

While in preference only water is used, other liquids or mixtures of liquids can be used and, in such a case, it is substantially only the vapours of the liquids that will exist only in the space above the level of the liquid in the closed chamber.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A mould of a type requiring heat to be taken from the mould from time to time, characterised in that the mould includes at least one closed chamber having liquid therein which extends to cover at least one of the areas from which heat is to be taken, and a space above the liquid and within the closed chamber, wherein pressure is set at a level which will enable the liquid to boil at a selected temperature, and condensing means to effect, by cooling, condensation of the vapour or vapours of the liquid in the space.
2. A mould as in claim 1 further characterised in that the chamber is shaped and positioned so that the liquid therein will have effective access to each of the areas of the mould from which heat is to be taken.
3. A mould as in either of claims 1 or 2 further characterised in that the liquid is water only.
4. A mould as in either of claims 1 or 2 further characterised in that the mould is a mould for moulding of plastics materials.
5. A mould as in either of claims 1 or 2 further characterised in that the mould is a die for the mould casting of metals.
6. A mould as in either of claims 1 or 2 further characterised in that the mould is a mould for injection moulding of plastics materials.
7. A mould as in either of claims 1 or 2 further characterised in that the mould is a mould for moulding by thermoforming of plastics materials.
8. A mould having an internal cooling arrangement which is a closed chamber having therein a liquid with a volume such that it has an upper level above at least some of the areas of the mould to be cooled and has substantially only the vapour or vapours of the liquid in a space within the chamber above the upper level of the liquid and condensing means to effect, by cooling, condensation of the vapour or vapours of the liquid.
9. A mould for injection moulding of plastics materials having an internal cooling arrangement which is a closed chamber partially filled with a liquid with an upper

level sufficient that at least some areas of the mould within the chamber adjacent to parts of the mould to be cooled are accessed by the liquid when the mould is in use and, in the space in the chamber above the liquid, substantially only the vapour of the liquid and condensing means within this space.

5

10. A mould for injection moulding of plastics materials having an internal cooling arrangement which is a closed chamber partially filled with a liquid with an upper level of sufficient height so that at least some areas of the mould within the chamber adjacent parts of the mould to be cooled are accessed by the liquid when the
- 10 mould is in use and, in a space in the chamber above the liquid, substantially only the vapour of the liquid, and an arrangement to provide cooling of any vapour within the space in the chamber above the liquid level to effect at least some condensation of the vapour thereby.
- 15 11. A mould as in any one of the preceding claims where the liquid is water.
12. A mould as in any one of preceding claims further characterised in that the vapour is water vapour.
- 20 13. A mould as in any one of the preceding claims 9-12 further characterised in that there is at least a heating means located within the chamber within the liquid such that during a standby time, the temperature of the die or mould can be kept within a selected range of temperatures.
- 25 14. A mould as in any one of the preceding claims 9-12 further characterised in that the cooling means include a tube, a core in the tube and means to direct cooling water through the tube.
15. A method of cooling of working parts of a mould where the mould has at
- 30 least one closed chamber having liquid therein which extends to cover at least one of the areas from which heat is to be taken, and a space above the liquid and within the closed chamber in which pressure within the space is caused to be set at a level which will enable the liquid to boil at a selected temperature, said selected temperature being at a level such that the temperature is below a temperature of the area from which heat is to be taken this being by reason of, as a first step,
- 35 partially filling of the closed chamber with the liquid and then extracting air so that there is substantially only the vapour or vapours of the liquid within the chamber above the upper level of the liquid, and passing at a selected cooling temperature,

14

liquid through condensing means to effect, by such cooling, condensation of vapour of the liquid in the space.

16. A method of cooling of working parts of a mould where the mould has at
5 least one closed chamber having liquid therein which extends to cover at least one of the areas from which heat is to be taken, and a space above the liquid and within the closed chamber in which pressure within the space is caused to be set at a level which will enable the liquid to boil at a selected temperature, said selected temperature being at a level such that the temperature is below a temperature of
10 the area from which heat is to be taken this being by reason of, as a first step, filling of the closed chamber with the liquid and then extracting a selected proportion of the liquid without allowing air to replace the extracted liquid, and passing at a selected cooling temperature, liquid through condensing means to effect, by such cooling, condensation of vapour of the liquid in the space.
- 15
17. A method as in any one of the preceding claims further characterised in that the liquid is water.

20

1/6


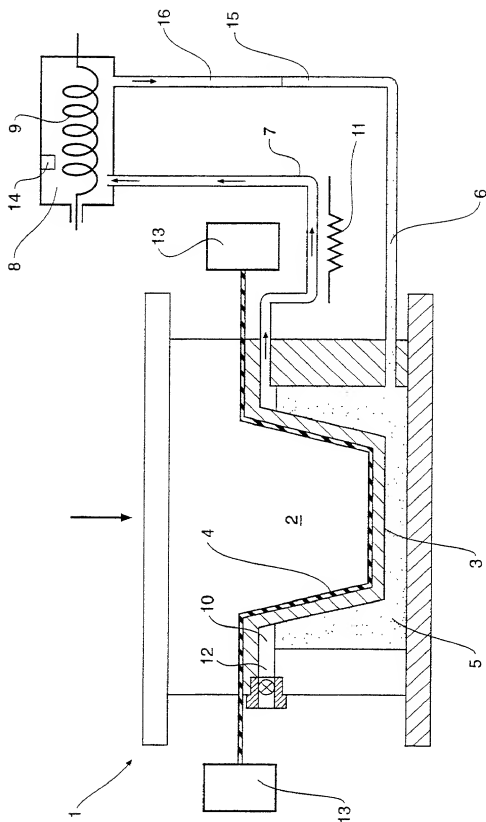


FIG 1

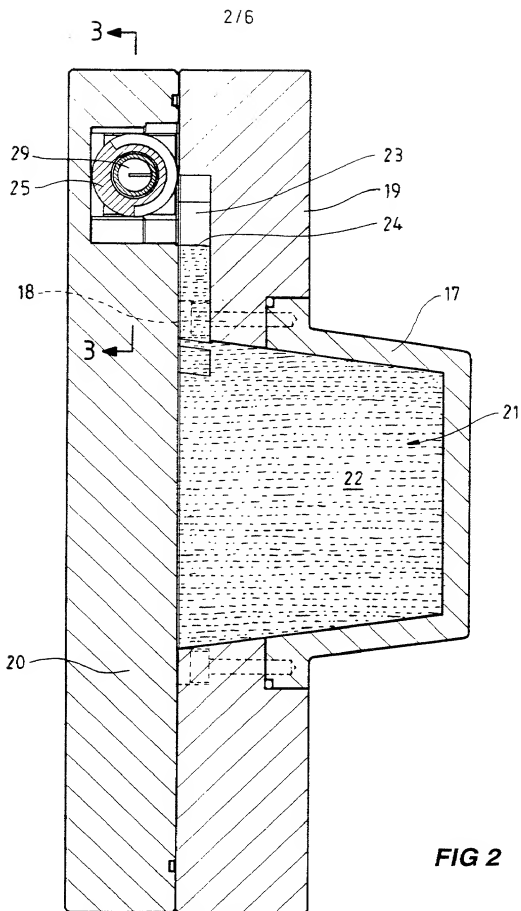

3/6

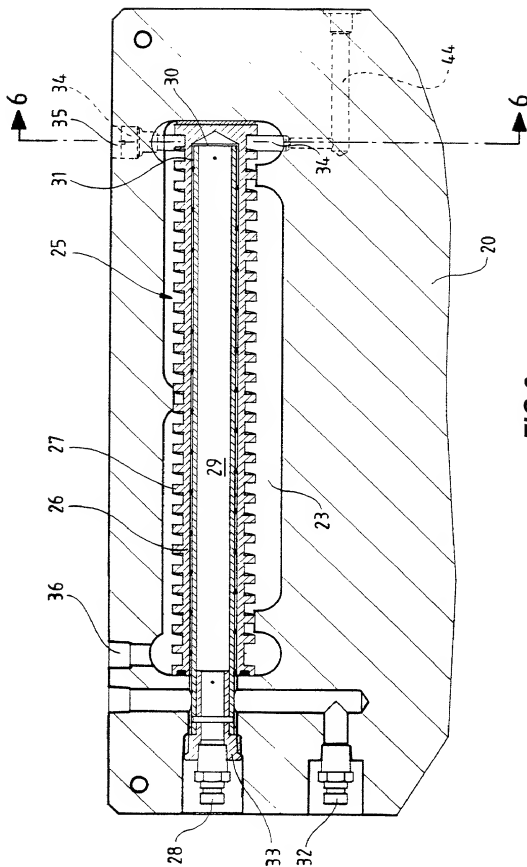


FIG 3

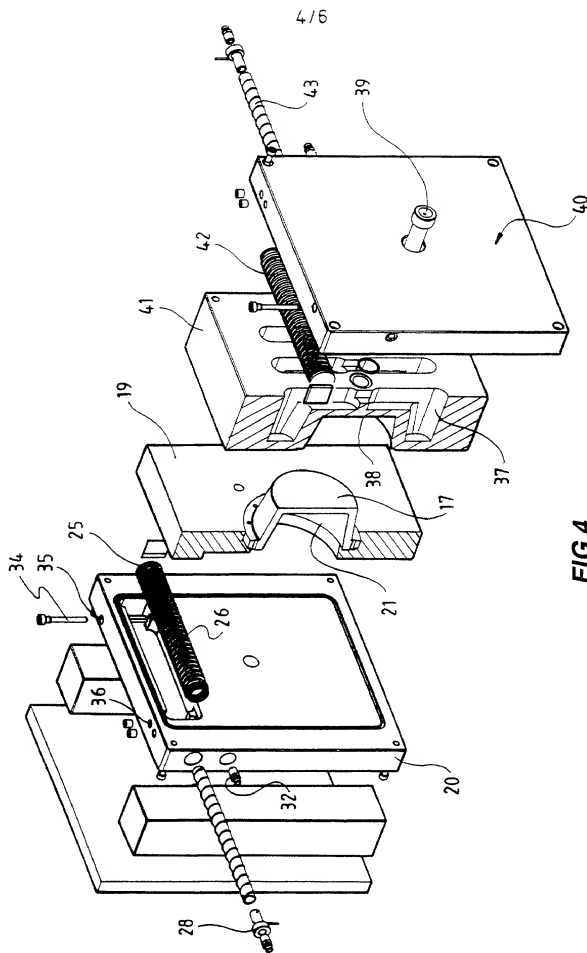


FIG 4

5/6

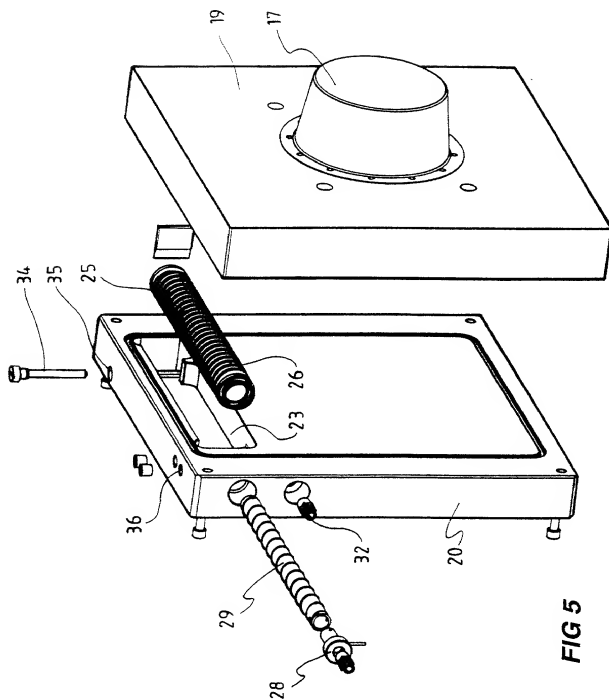


FIG 5

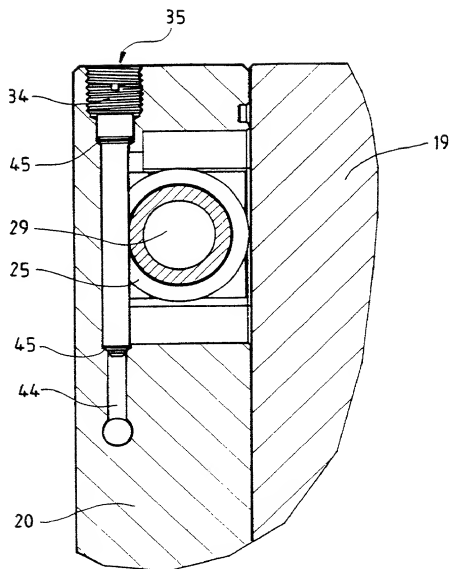


FIG 6

Docket No.: COLLI'P-30 / 500556.20006

DECLARATION FOR PATENT APPLICATION

As a below named inventor(s), I (we) hereby declare that:

My (our) residence(s), post office address(es) and citizenship(s) is (are) the same as stated below next to my (our) name(s).

I (we) believe I am (we are) an original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **TEMPERATURE CONTROL METHOD AND APPARATUS**

the specification of which is attached hereto unless the following box is checked:

[X] was filed on June 9, 1999, as United States Application Number or PCT International Application Number PCT/AU99/00448 and was amended on July 25, 2000 (if applicable).

I (we) hereby state that I (we) have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I (we) acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I (we) hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			Priority Claimed:	
(Number)	(Country)	(Day/Month/Year)	YES	NO
PP 4403	AUSTRALIA	11 JUNE 1998	X	

I (we) hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

(Application Number) (Filing Date)

I (we) hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I (we) acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulation, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.)	(Filing date)	(STATUS-patented, pending, abandoned)

I (we) hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Lloyd McAulay, Reg. No. 20,423; J. Harold Nissen, Reg. No. 17,283; Jules E. Goldberg, Reg. No. 24,408;
 Gerald H. Kiel, Reg. No. 25,116; Eugene LeDonne, Reg. No. 35,930; Stephen M. Chin, Reg. No. 39,938;
 Arthur Dresner, Reg. No. 24,403; Samir R. Patel, Reg. No. 44,998; Daniel P. Lent, Reg. No. 44,867

all of Reed Smith LLP, 375 Park Avenue, New York, New York 10152.

Address all telephone calls to: J. Harold Nissen, Esq. at Telephone No. (212) 986-4090


Address all correspondence to: J. Harold Nissen, Esq.
 Reed Smith LLP
 375 Park Avenue, New York, NY 10152 U.S.A.

I (we) hereby declare that all statements made herein of my (our) own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or 1st inventor (given name, family name): **Malcolm Barry JAMES**

Residence: **Campbelltown, S. A. 5074, AUSTRALIA** Citizenship: **AUSTRALIAN**

Post Office Address: **2 Janet Street, Campbelltown, S. A. 5074, AUSTRALIA**

Inventor's signature: 

Date: **28-2-2001**